


1 3/8 Pro and 200 Rink Rat -6x4 Portable Hockey Goal Assembly Instructions


ArizonaSportsEquipment.com
800-861-8628

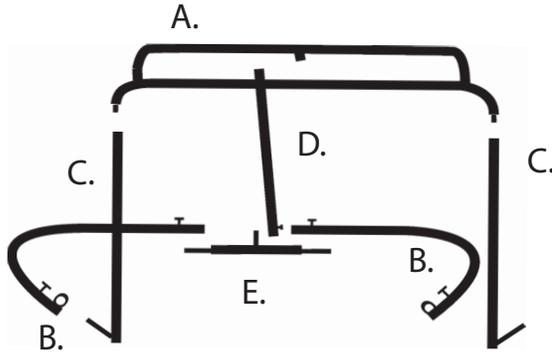

Contents:

- (1-Qty) - Top Assembly with Netting (A.)
- (2-Qty) - Base Halves (B.)
- (2-Qty) - Red Posts (C.)
- (1-Qty) - Diagonal Support Bar (D.)
- (1-Qty) - Base Tee (E.)
- (1-Qty) - Roll Skirting with Cord (Not Pictured)

1. Begin by identifying your parts. Once familiarized, begin with the two base halves (B.), all fittings facing up, welded washers facing front. On a flat, sturdy surface insert base tee (E.) into each back end of base halves.. Snug bolts, but do not fully tighten, these fittings will be tightened later for proper angle.
2. Insert the 2 red posts (C.) fully into front base halves. Snug bolts to secure. Next, insert the diagonal support bar (D.) into base tee's fitting. Snug bolts to secure. All three uprights should now be in place. Loose uprights might swing down, so please use caution.
3. Carefully slide top assembly with netting (A.) onto the three uprights, best done simultaneously. Be sure to keep net on the outside of the diagonal support bar. Top of goal should appear level. Now, secure bolts at base tee and top of diagonal support bar.
4. One turnbuckle should now hang along each bottom of post. The correct amount of netting to be threaded along cable should already be in place. Cable with turnbuckle runs along post, ending at corner of net. Next, hook each turnbuckle into each welded washer at front base halves. Rotate each turnbuckle in order to tighten cable, no need to over tighten, cables should be finger tight only. The cable, with attached netting, should run parallel along posts and appear straight.
5. Lace netting onto goal at top assembly, using provided cord at center of crossbar. Tie netting onto welded wire loops starting at center of crossbar, lacing out to posts. Selvages, or net loops, will not necessarily correspond to welded wire loops. Lace evenly. "Scrunching" net on top assembly may be necessary.
6. Next, find middle of remaining net at base halves by counting selvages. Use provided cord to tie centered net at base tee. Begin weaving netting along base halves, starting at base tee, out to posts. Cord along base halves will look similar to a candy cane stripe. Continue weaving net onto base halves towards the post, while considering evenly placed net along base halves. Tie net securely at front of base halves' welded washer.
7. Skirting wraps around base halves, sandwiching the net and pipe in between. This will provide protection inside and out. Start with goal face down and use provided lacing cord to tie middle of skirt at center base tee. Once skirt is centered along base halves and securely fastened onto net, begin weaving skirt onto net out to post in and out of each hole. When skirting reaches post, knot skirt together and fasten onto net.

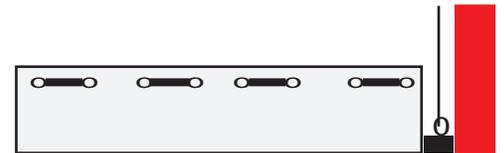

*To disassemble goal for easy storage, begin by loosening turnbuckle and un-hooking each side. Next, loosen bolt at top of diagonal support bar. Top assembly with netting may now be lifted off posts and diagonal support bar. Finally, loosen the bolts securing the 3 uprights so they may pass through netting and be set down on base halves.